

6000 Serisi Rulmanlar ve Teknik Ölçüleri




RULMAN NO	BOYUTLAR (mm)			Yük Sayısı (KN)		Devir - Hız Sınırı (devir/dak.)			Ağırlık (kg)
	İç Çap (d)	Dış Çap (D)	Kalınlık (B)	Dinamik (C)	Statik (Co)	Gres		Sıvı Yağ	
						Açık - ZZ	2RS		
6000	10	26	8	4,55	1,96	30.000	22.000	36.000	0,0190
6001	12	28	8	5,10	2,36	28.000	18.000	32.000	0,0210
6002	15	32	9	5,60	2,85	24.000	15.000	28.000	0,0290
6003	17	35	10	6,00	3,25	22.000	14.000	26.000	0,0370
6004	20	42	12	9,30	5,00	18.000	11.000	21.000	0,0650
6005	25	47	12	10,00	5,85	15.000	9.500	18.000	0,0770
6006	30	55	13	12,70	8,00	13.000	8.000	15.000	0,1150
6007	35	62	14	16,30	10,40	12.000	6.800	14.000	0,1510
6008	40	68	15	17,00	11,80	10.000	6.100	12.000	0,1880
6009	45	75	16	20,00	14,30	9.200	5.400	11.000	0,2310
6010	50	80	16	20,80	15,60	8.500	5.000	10.000	0,2610
6011	55	90	18	28,50	21,20	7.700	4.500	9.000	0,3770
6012	60	95	18	29,00	23,20	7.100	4.100	8.500	0,4100
6013	65	100	18	30,50	25,00	6.700	4.000	8.000	0,4360
6014	70	110	20	39,00	31,50	6.100	3.600	7.100	0,6040
6015	75	115	20	40,00	34,00	5.700	3.400	6.700	0,6430
6016	80	125	22	47,50	40,00	5.300	3.200	6.300	0,8500
6017	85	130	22	50,00	43,00	5.000	3.000	6.000	0,8950
6018	90	140	24	58,50	50,00	4.800	2.900	5.600	1,1800
6019	95	145	24	60,00	54,00	4.500	2.700	5.300	1,2100
6020	100	150	24	70,00	60,00	4.300	2.600	5.300	1,2600
6022	110	170	19	80,00	71,00	3.800	2.300	4.500	1,9700
6024	120	180	28	83,00	78,00	3.600	2.200	4.300	2,1100
6026	130	200	33	104,00	100,00	3.200	1.900	3.800	3,2700

ÜRÜN GÖRSEL



TEKNİK ÇİZİM

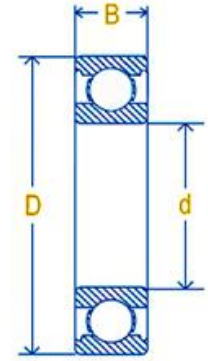


Rulman No	BOYUTLAR (mm)			Yük Sayısı (KN)		Devir - Hız Sınırı (devir/dak.)			Ağırlık (kg)
	İç Çap (d)	Dış Çap (D)	Kalınlık (B)	Dinamik (C)	Statik (Co)	Gres		Sıvı Yağ	
						Açık - ZZ	2RS		
6200	10	30	9	6,00	2,60	25.000	18.000	30.000	0,0300
6201	12	32	10	6,95	3,10	22.000	17.000	28.000	0,0350
6202	15	35	11	7,80	3,75	20.000	15.000	27.000	0,0430
6203	17	40	12	9,50	4,75	18.000	12.000	21.000	0,0630
6204	20	47	14	12,70	6,55	16.000	11.000	18.000	0,1050
6205	25	52	15	14,30	8,00	13.000	9.000	16.000	0,1250
6206	30	62	16	19,30	11,20	11.000	7.500	13.000	0,1920
6207	35	72	17	25,50	15,30	9.800	6.300	11.000	0,2880
6208	40	80	18	29,00	18,00	8.700	5.600	10.000	0,3660
6209	45	85	19	32,50	20,40	7.800	5.300	9.300	0,4050
6210	50	90	20	36,50	24,00	7.100	4.800	8.600	0,4530
6211	55	100	21	43,00	29,00	6.400	4.300	7.700	0,6070
6212	60	110	22	52,00	36,00	6.000	3.800	7.100	0,7830
6213	65	120	23	60,00	41,50	5.500	3.600	6.700	0,9820
6214	70	125	24	62,00	44,00	5.100	3.400	6.300	1,0800
6215	75	130	25	65,50	49,00	4.800	3.200	5.600	1,2100
6216	80	140	26	72,00	53,00	4.500	3.000	5.300	1,4200
6217	85	150	28	83,00	64,00	4.300	2.800	5.000	1,8200
6218	90	160	30	96,50	72,00	4.000	2.600	4.800	2,2000
6219	95	170	32	108,00	81,50	3.800	2.500	4.500	2,6700
6220	100	180	34	122,00	93,00	3.600	2.400	4.300	3,2200
6222	110	200	38	143,00	116,00	3.200	2.100	3.800	4,5700
6224	120	215	40	146,00	122,00	2.900	1.900	3.400	5,6000
6226	130	230	40	166,00	146,00	2.700	1.800	3.200	6,2200



ÖRÜN GÖRSEL



TEKNİK ÇİZİM

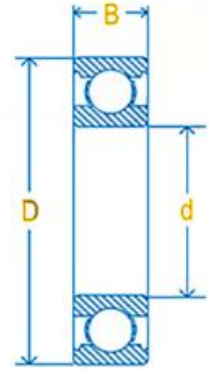


Rulman No	BOYUTLAR (mm)			Yük Sayısı (KN)		Devir - Hız Sınırı (devir/dak.)			Ağırlık (kg)
	İç Çap (d)	Dış Çap (D)	Kalınlık (B)	Dinamik (C)	Statik (Co)	Gres		Sıvı Yağ	
						Açık - ZZ	2RS		
6300	10	35	11	8,15	3,45	23.000	17.000	34.000	0,0540
6301	12	37	12	9,65	4,15	20.000	16.000	27.000	0,0610
6302	15	42	13	11,40	5,40	17.000	13.000	21.000	0,0850
6303	17	47	14	13,40	6,55	16.000	11.000	19.000	0,1110
6304	20	52	15	17,30	8,50	14.000	10.000	17.000	0,1480
6305	25	62	17	22,40	11,40	12.000	8.100	14.000	0,2320
6306	30	72	19	29,00	16,30	10.000	6.700	12.000	0,3480
6307	35	80	21	33,50	19,00	8.800	6.000	10.000	0,4580
6308	40	90	23	42,50	25,00	7.800	5.300	9.200	0,6320
6309	45	100	25	53,00	32,00	7.000	4.800	8.200	0,8480
6310	50	110	27	62,00	38,00	6.400	4.300	7.500	1,1000
6311	55	120	29	76,50	47,50	5.800	4.000	6.800	1,3900
6312	60	130	31	81,50	52,00	5.400	3.600	6.300	1,7200
6313	65	140	33	93,00	60,00	4.900	3.400	6.000	2,1300
6314	70	150	35	104,00	68,00	4.600	3.200	5.400	2,6300
6315	75	160	37	114,00	76,50	4.300	2.900	5.000	3,1200
6316	80	170	39	122,00	86,50	4.000	2.800	4.800	3,7300
6317	85	180	41	125,00	88,00	3.800	2.600	4.500	4,2400
6318	90	190	43	134,00	102,00	3.600	2.400	4.300	5,2700
6319	95	200	45	143,00	112,00	3.300	2.300	3.900	6,1400
6320	100	215	47	163,00	134,00	3.200	2.200	3.700	7,5600

ÜRÜN GÖRSEL



TEKNİK ÇİZİM




Rulman No	BOYUTLAR (mm)			Yük Sayısı (KN)		Devir - Hız Sınırı (devir/dak.)			
	İç Çap (d)	Dış Çap (D)	Kalınlık (B)	Dinamik (C)	Statik (Co)	Gres		Sıvı Yağ	
						Açık - ZZ	2RS		
6403	17	62	17	23,60	11,00	14.000	-	16.000	0,2730
6404	20	72	19	30,50	15,00	12.000	-	14.000	0,4130
6405	25	80	21	36,00	19,30	10.000	-	12.000	0,5470
6406	30	90	23	42,50	23,30	8.800	-	10.000	0,7400
6407	35	100	25	55,00	31,00	7.800	-	9.100	0,9720
6408	40	110	27	63,00	36,50	7.000	-	8.200	1,2600
6409	45	120	29	76,50	45,00	6.300	-	7.400	1,5700
6410	50	130	31	86,50	52,00	5.500	-	6.500	1,9500

ÖRÜN GÖRSEL



TEKNİK ÇİZİM

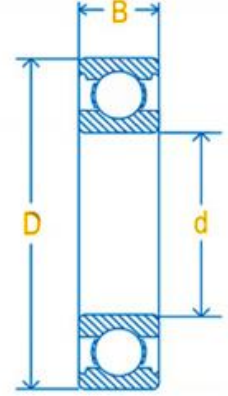

Rulman No	BOYUTLAR (mm)			Yük Sayısı (KN)		Devir - Hız Sınırı (devir/dak.)			
	İç Çap (d)	Dış Çap (D)	Kalınlık (B)	Dinamik (C)	Statik (Co)	Gres		Sıvı Yağ	
						Açık - ZZ	2RS		
6700	10	15	3	0,80	0,39	36.000	-	42.000	0,0019
6701	12	18	4	0,91	0,53	32.000	-	38.000	0,0031
6702	15	21	4	0,95	0,59	29.000	-	34.000	0,0036
6703	17	23	4	0,96	0,61	26.000	-	31.000	0,0040
6704	20	27	4	1,03	0,72	23.000	-	28.000	0,0059
6705	25	32	4	1,09	0,83	19.000	-	23.000	0,0070
6706	30	37	4	1,17	0,98	17.000	-	20.000	0,0083
6707	35	44	5	1,85	1,63	14.000	-	16.000	0,0150




Rulman NO	BOYUTLAR (mm)			Yük Sayısı (KN)		Devir - Hız Sınırı (devir/dak.)			Ağırlık (kg)
	İç Çap (d)	Dış Çap (D)	Kalınlık (B)	Dinamik (C)	Statik (Co)	Gres		Sıvı Yağ	
						Açık - ZZ	2RS		
SS 6000	10	26	8	4,55	1,96	30.000	22.000	36.000	0,0190
SS 6001	12	28	8	5,10	2,36	28.000	18.000	32.000	0,0210
SS 6002	15	32	9	5,60	2,85	24.000	15.000	28.000	0,0290
SS 6003	17	35	10	6,00	3,25	22.000	14.000	26.000	0,0370
SS 6004	20	42	12	9,30	5,00	18.000	11.000	21.000	0,0650
SS 6005	25	47	12	10,00	5,85	15.000	9.500	18.000	0,0770
SS 6006	30	55	13	12,70	8,00	13.000	8.000	15.000	0,1150
SS 6007	35	62	14	16,30	10,40	12.000	6.800	14.000	0,1510
SS 6008	40	68	15	17,00	11,80	10.000	6.100	12.000	0,1880
SS 6009	45	75	16	20,00	14,30	9.200	5.400	11.000	0,2310
SS 6010	50	80	16	20,80	15,60	8.500	5.000	10.000	0,2610
SS 6011	55	90	18	28,50	21,20	7.700	4.500	9.000	0,3770
SS 6012	60	95	18	29,00	23,20	7.100	4.100	8.500	0,4100

ÖRÜN GÖRSEL



Rulman NO	BOYUTLAR (mm)			Yük Sayısı (KN)		Devir - Hız Sınırı (devir/dak.)			Ağırlık (kg)
	İç Çap (d)	Dış Çap (D)	Kalınlık (B)	Dinamik (C)	Statik (Co)	Gres		Sıvı Yağ	
						Açık - ZZ	2RS		
SS 6200	10	30	9	6,00	2,60	25.000	18.000	30.000	0,0300
SS 6201	12	32	10	6,95	3,10	22.000	17.000	28.000	0,0350
SS 6202	15	35	11	7,80	3,75	20.000	15.000	27.000	0,0430
SS 6203	17	40	12	9,50	4,75	18.000	12.000	21.000	0,0630
SS 6204	20	47	14	12,70	6,55	16.000	11.000	18.000	0,1050
SS 6205	25	52	15	14,30	8,00	13.000	9.000	16.000	0,1250
SS 6206	30	62	16	19,30	11,20	11.000	7.500	13.000	0,1920
SS 6207	35	72	17	25,50	15,30	9.800	6.300	11.000	0,2880
SS 6208	40	80	18	29,00	18,00	8.700	5.600	10.000	0,3660
SS 6209	45	85	19	32,50	20,40	7.800	5.300	9.300	0,4050
SS 6210	50	90	20	36,50	24,00	7.100	4.800	8.600	0,4530
SS 6211	55	100	21	43,00	29,00	6.400	4.300	7.700	0,6070
SS 6212	60	110	22	52,00	36,00	6.000	3.800	7.100	0,7830
SS 6213	65	120	23	60,00	41,50	5.500	3.600	6.700	0,9820
SS 6214	70	125	24	62,00	44,00	5.100	3.400	6.300	1,0800
SS 6215	75	130	25	65,50	49,00	4.800	3.200	5.600	1,2100
SS 6216	80	140	26	72,00	53,00	4.500	3.000	5.300	1,4200

TEKNİK ÇİZİM

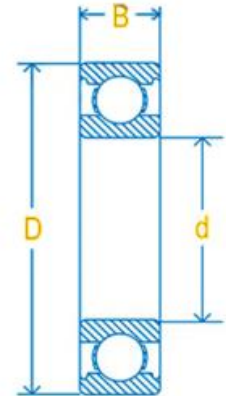


Rulman NO	BOYUTLAR (mm)			Yük Sayısı (KN)		Devir - Hız Sınırı (devir/dak.)			Ağırlık (kg)
	İç Çap (d)	Dış Çap (D)	Kalınlık (B)	Dinamik (C)	Statik (Co)	Gres		Sıvı Yağ	
						Açık - ZZ	2RS		
SS 6300	10	35	11	8,15	3,45	23.000	17.000	34.000	0,0540
SS 6301	12	37	12	9,65	4,15	20.000	16.000	27.000	0,0610
SS 6302	15	42	13	11,40	5,40	17.000	13.000	21.000	0,0850
SS 6303	17	47	14	13,40	6,55	16.000	11.000	19.000	0,1110
SS 6304	20	52	15	17,30	8,50	14.000	10.000	17.000	0,1480
SS 6305	25	62	17	22,40	11,40	12.000	8.100	14.000	0,2320
SS 6306	30	72	19	29,00	16,30	10.000	6.700	12.000	0,3480
SS 6307	35	80	21	33,50	19,00	8.800	6.000	10.000	0,4580
SS 6308	40	90	23	42,50	25,00	7.800	5.300	9.200	0,6320
SS 6309	45	100	25	53,00	32,00	7.000	4.800	8.200	0,8480
SS 6310	50	110	27	62,00	38,00	6.400	4.300	7.500	1,1000

ÖRÜN GÖRSEL



Rulman NO	BOYUTLAR (mm)			Yük Sayısı (KN)		Devir - Hız Sınırı (devir/dak.)			Ağırlık (kg)
	İç Çap (d)	Dış Çap (D)	Kalınlık (B)	Dinamik (C)	Statik (Co)	Gres		Sıvı Yağ	
						Açık - ZZ	2RS		
SS 6800	10	19	5	1,80	0,93	37.000	24.000	44.000	0,0050
SS 6801	12	21	5	1,90	1,00	32.000	20.000	39.000	0,0060
SS 6802	15	24	5	2,10	1,30	28.000	17.000	34.000	0,0070
SS 6803	17	26	5	2,20	1,50	26.000	15.000	30.000	0,0080
SS 6804	20	32	7	3,50	2,20	22.000	13.000	26.000	0,0180
SS 6805	25	37	7	4,30	2,90	18.000	10.000	22.000	0,0220
SS 6806	30	42	7	4,70	3,60	15.000	9.000	18.000	0,0260

TEKNİK ÇİZİM

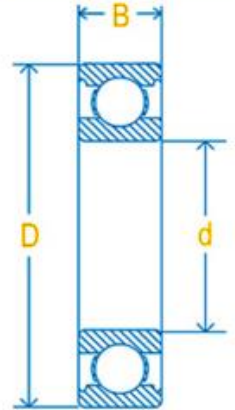

SS 6900	10	22	6	2,70	1,30	33.000	22.000	38.000	0,0080
SS 6901	12	24	6	2,90	1,50	30.000	20.000	36.000	0,0090
SS 6902	15	28	7	4,30	2,30	26.000	17.000	31.000	0,0120
SS 6903	17	30	7	4,60	2,60	24.000	15.000	29.000	0,0140
SS 6904	20	37	9	6,40	3,70	19.000	12.000	23.000	0,0310
SS 6905	25	42	9	7,00	4,50	16.000	10.000	20.000	0,0380
SS 6906	30	47	9	7,20	5,00	14.000	8.500	17.000	0,0430
SS 6907	35	55	10	9,50	6,80	12.000	7.500	15.000	0,0780

SS 608	8	22	7	3,29	1,36	32.000	20.000	37.000	0,0129
--------	---	----	---	------	------	--------	--------	--------	--------




RULMAN NO	BOYUTLAR (mm)			Devir - Hız Sınırı (devir/dak.)	Ağırlık (kg)
	İç Çap (d)	Dış Çap (D)	Kalınlık (B)		
H6000	10	26	8	1.500	0,0140
H6001	12	28	8	1.400	0,0170
H6002	15	32	9	1.200	0,0240
H6003	17	35	10	1.100	0,0320
H6004	20	42	12	900	0,0520
H6005	25	47	12	750	0,0610
H6006	30	55	13	650	0,0890
H6007	35	62	14	600	0,1200
H6008	40	68	15	500	0,1500
H6009	45	75	16	460	0,1900

ÖRÜN GÖRSEL



H6200	10	30	9	1.250	0,0250
H6201	12	32	10	1.100	0,0280
H6202	15	35	11	1.000	0,0350
H6203	17	40	12	900	0,0520
H6204	20	47	14	800	0,0820
H6205	25	52	15	650	0,0990
H6206	30	62	16	550	0,1500
H6207	35	72	17	490	0,2200
H6208	40	80	18	435	0,2800
H6209	45	85	19	390	0,3200

TEKNİK ÇİZİM

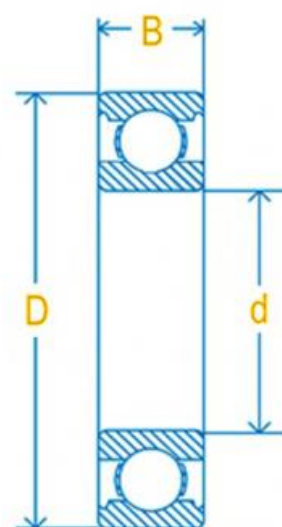

H6304	20	52	15	700	0,1100
H6305	25	62	17	600	0,1800
H6306	30	72	19	500	0,2700
H6307	35	80	21	440	0,3600
H6308	40	90	23	390	0,4900